
REFER TO TABLE ON EWP PRODUCT VERTICAL LOAD TRANSFER CAPACITY FOR CLARIFICATION

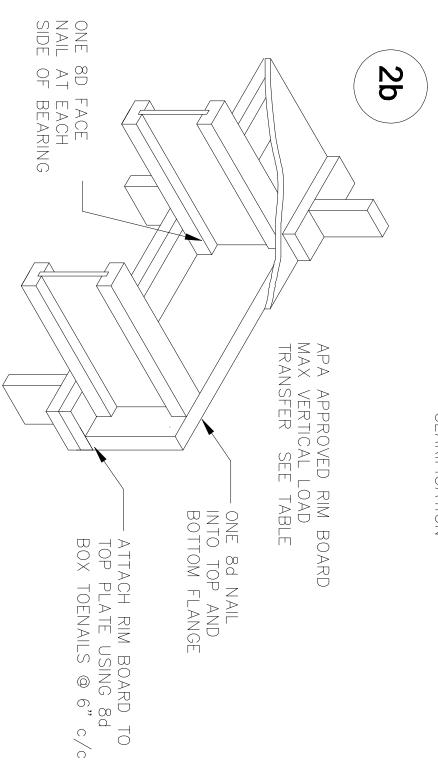

TO AVOID SPLITTING FLANGES, START NAILS 1 1/2" FROM END OF I—JOIST. NAILS MAY BE DRIVEN IN AT AN ANGLE TO AVOID SPLITING BEARING PLATE